

# SlowStop Rebounding Bollard




**TRAFFIC SAFETY  
SUPPLY COMPANY**



## PRODUCT DESCRIPTION

Our SlowStop Rebounding Steel Bollards are successfully used in commercial locations, industrial environments, logistical sites, and for traffic control situations. Their strength rivals that of traditional embedded bollards with lower costs and less hassle. Our bollards are surface mounted in approximately 15 minutes and are immediately ready for use once installed. Each kit comes with everything you need to install a single rebounding bollard.

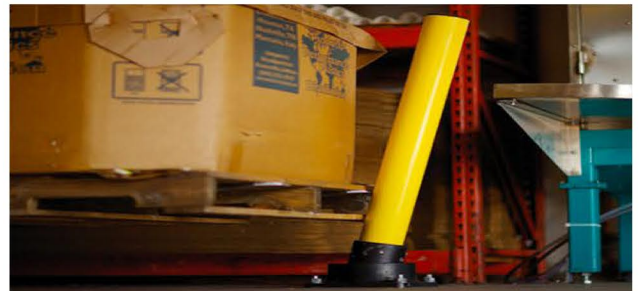

### THE BENEFITS OF THE SLOWSTOP BOLLARD SYSTEM ARE NUMEROUS. AMONG THEM ARE THE FOLLOWING:

- **2 Year Product Warranty**

Our Slowstop product line is backed by a two year warranty

- **Increased Personnel Safety**

Vehicle occupants are less likely to be injured as peak impact forces are lessened

- **Reduced Damage**

Damage is reduced to both the vehicle and the bollard during impact when compared to a rigid bollard

- **Reduced Asset Loss**

Forklift loads are less likely to be lost during accidental collision

- **Installation is Simple**

Installation of our standard bollards require only common tools and take about 15 minutes each to install

- **Installation is Simple**

Installation of our standard bollards require only common tools and take about 15 minutes each to install

- **No core drilling**

- **No backfilling**

- **No Painting**

- **No Welding**

- **No Aisle Closure**

- **Instantly Operational**

There are no waiting periods, such as concrete curing or paint drying, before our guards are ready to use. Once installation is complete, the system is fully operational.

- **Modular System**

Our modular system allows for the replacement of damaged parts without excavating and repairing concrete

- **Flexible Relocation**

Relocation of our Slowstop bollards is quick and simple. Simply remove the anchor screws from the concrete and install the bollard in a new location. No large core holes to repair and no chipping away old concrete.

- **Custom Fencing and Barriers**

Fencing and complex barriers can be created to your exact size requirements, from slide-together connectors, without the need for welding.

**Note: Specifications are approximate and subject to change. Some parts shown may be for illustration purposes only.**

# SlowStop Rebounding Bollard




**TRAFFIC SAFETY  
SUPPLY COMPANY**



## SPECIFICATIONS

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal
Diameter	2.88" (2.5 ANSI Schedule 40)
Product Weight	37lbs
Energy Absorption	1621 joules/1,195 ft - lb
Temperature Rating	-40°F - 150°F
Pipe Coating	60µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast Iron Coating	Environmentally Friendly Water-based KTL Coating + Polyester Outdoor Powder Coating
Set Screws	(5) M12
Anchor Screws	(4) 5/8" x 5-1/2" Concrete Anchor Screws



### 3" REBOUNDING STEEL BOLLARD KIT (42" HEIGHT)

Ideal for light applications such as electric carts and pallet jacks. Also great for residential uses. Hardware and anchors included.

## SPECIFICATIONS

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal
Diameter	4.00" (3.5" ANSI Schedule 40)
Product Weight	62lbs
Energy Absorption	2667 joules/1,967 ft - lb
Temperature Rating	-40°F - 150°F
Pipe Coating	60µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast Iron Coating	Environmentally Friendly Water-based KTL Coating + Polyester Outdoor Powder Coating
Set Screws	(5) M16
Anchor Screws	(4) 5/8" x 5-1/2" Concrete Anchor Screws



### 4" REBOUNDING STEEL BOLLARD KIT (42" HEIGHT)

Ideal for light applications such as low speed cars, light trucks, and moving, 5000 lb forklifts. Hardware and anchors included.

**Note: Specifications are approximate and subject to change. Some parts shown may be for illustration purposes only.**



# SlowStop Rebounding Bollard



**TRAFFIC SAFETY  
SUPPLY COMPANY**



## SPECIFICATIONS

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal
Diameter	5.56" (5" ANSI Schedule 40)
Product Weight	110lbs
Energy Absorption	7000 joules/5,163 ft - lb
Temperature Rating	-40°F - 150°F
Pipe Coating	60µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast Iron Coating	Environmentally Friendly Water-based KTL Coating + Polyester Outdoor Powder Coating
Set Screws	(6) M16
Anchor Screws	(6) 5/8" x 5-1/2" Concrete Anchor Screws




### 5" REBOUNTING STEEL BOLLARD KIT (42" HEIGHT)

Ideal for light applications such as cars, large trucks, and typical fork lifts. Hardware and anchors included.

## SPECIFICATIONS

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal
Diameter	6.63" (6" ANSI Schedule 40)
Product Weight	161lbs
Energy Absorption	12934 joules/9,536 ft - lb
Temperature Rating	-40°F - 150°F
Pipe Coating	60µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast Iron Coating	Environmentally Friendly Water-based KTL Coating + Polyester Outdoor Powder Coating
Set Screws	(8) M16
Anchor Screws	(8) 5/8" x 5-1/2" Concrete Anchor Screws

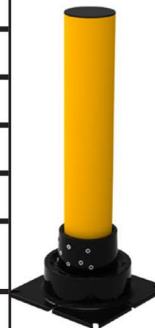

### 6" REBOUNTING STEEL BOLLARD KIT (42" HEIGHT)

Ideal for light applications such as delivery trucks, heavy fork lifts, and even semi-trucks. Great for loading and entrance ramps. Hardware and anchors included.

**Note: Specifications are approximate and subject to change. Some parts shown may be for illustration purposes only.**