

Safewalk™ Crosswalk Illuminator



**TRAFFIC SAFETY
SUPPLY COMPANY**

FEATURES & BENEFITS

Increase pedestrian visibility at poorly lit, two-lane crossings with the SafeWalk™ Crosswalk Illuminator – a simple safety enhancement to Pedestrian Crosswalk Systems.


Flood light illuminates the approach area of the crosswalk

Beam light projects outward, illuminating the middle of the crosswalk


Activates concurrently with LED-enhanced warning alerts

Adjustable brackets allow for precise light focus at most crossings

Rugged enclosure to withstand weather and surrounding environment

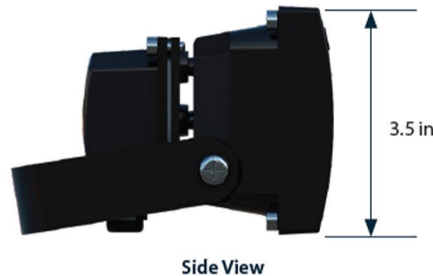

Side View

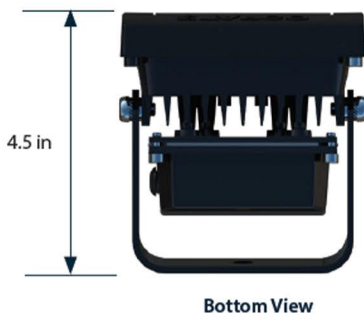

Bottom View

SPECIFICATIONS

Power Input	12VDC
Power Consumption	700mA to 1.4A
Light Distance	6 by 15 feet per illuminator
Installation Height	12 to 15 feet
Housing	Aluminum and weather resistant polycarbonate
Operating Temperature Range	-40°F to 176°F (-40°C to 80°C)

Note: Specifications are approximate and subject to change. Some parts shown may be for illustration purposes only.

Safewalk™ Crosswalk Illuminator



TRAFFIC SAFETY
SUPPLY COMPANY



SYSTEM CAPABILITIES	
Compatibility	RRFB, Blinkersign® and BinkerBeacon™ Pedestrian Crosswalk Systems
Light Vitality	2 LEDs engineered to light up a crosswalk
Light Duration	Varies based on preprogrammed settings - works in conjunction with warning alerts
Wind Load Rating	Up to 120 mph (dependent upon pole size and system arrangement)



**Note: Specifications are approximate and subject to change.
Some parts shown may be for illustration purposes only.**