



SC Pro Light

Portable Workzone Lighting Solution

TRAFFIC SAFETY
SUPPLY COMPANY

»» IMPROVING TODAY FOR A SAFER TOMORROW

PRODUCT OVERVIEW

PRODUCT NO. - DP08237

The battery powered SC Pro Light offer 360-degree diffused light. Whether used for construction or safety and rescue, high quality lighting is vital to creating a safe working environment.

FEATURES & BENEFITS

- 360-degree diffused light
- Battery Powered
- Lasts up to 12 hours in Eco Mode
- No shadowing
- Portable & Lightweight
- Rain, dust, and fire-resistant
- Envelope variants available: lenticular, reversed reflector, logo personalization, modifiable reflector

APPLICATIONS

WORK LIGHTING

- Construction
- Roads & Traffic
- Agriculture
- Oil & Gas
- Mining

EMERGENCY LIGHTING

- Fire & Rescue
- EMS
- Emergency Preparedness
- Disaster Recovery

SECURITY LIGHTING

- Law Enforcement
- Military Defense



The specifications provided are approximate and subject to change. Graphics and illustrations are intended for illustrative purposes only.

If it's not right, we'll make it right - since 1956.

Copyright 2025, Traffic Safety Supply Company.

2324 SE Umatilla Street, Portland, OR 97202 / +1 503.235.8531 / 1.800.547.8518 / TSSCO.COM






SC Pro Light

Portable Workzone Lighting Solution

TRAFFIC SAFETY
SUPPLY COMPANY

»» IMPROVING TODAY FOR A SAFER TOMORROW

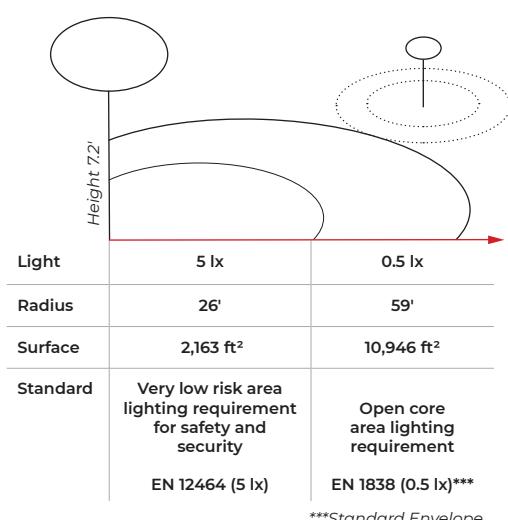

Lighting Data	
Light Engine	Airstar LED Matrix: 4 x 5 125 lm
Maximum lumen	20,500 lm
Average LED life*	50,000 h
Color Temperature: daylight	5,000 K
CRI	70
Light under the balloon** (7.2 ft high)	32 fc

*Under normal conditions of use **Lenticular Envelope

Dimensions and Packaging	
Envelope size	Ø 23 h 15"
Stand height	7.2'
Net weight of the balloon	5#
SC Pro Light version (handle and wheels)	
Case dimensions	L 26 x w 20 x h 10"
Included in the transport case: Full set lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit, 1x connecting cable	
Transport gross weight	50#

Technical Data		
Wind resistance	50 mph	
Power Consumption	160 W	
Efficiency	138 lm/W 3,728 lm/lb	
Battery voltage	52 V	
Maximum power	125 W	
Available voltage	48 V DC	
Mode	Full	Efficient
Battery life	4 h	6.5 h
Recommended battery	830 Wh (16 Ah) / 52 V	
Certifications	IEC-60598-1, CE, IP54	

The specifications provided are approximate and subject to change. Graphics and illustrations are intended for illustrative purposes only.

If it's not right, we'll make it right - since 1956.

Copyright 2025, Traffic Safety Supply Company.

2324 SE Umatilla Street, Portland, OR 97202 / +1 503.235.8531 / 1.800.547.8518 / TSSCO.COM

