


# Polymer Surface-Applied ADA Detectable Warning Tile



TRAFFIC SAFETY  
SUPPLY COMPANY

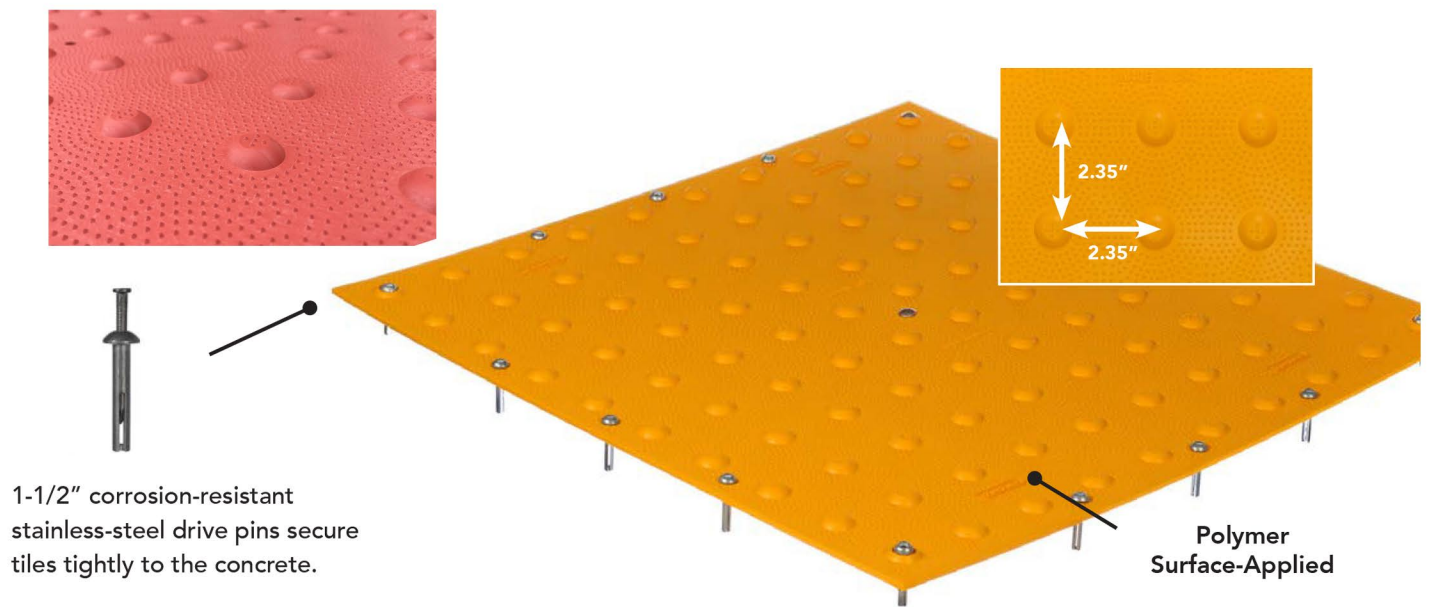

1-1/2" corrosion-resistant stainless-steel drive pins secure tiles tightly to the concrete.

Polymer  
Surface-Applied

## NO BLOOMING, NO CRACKING, NO FADING

### POLYMER BENEFITS

Low-profile beveled edges provide a compliant transition from surrounding surfaces.

### PREMIUM PERFORMANCE

Engineered to withstand high-volume pedestrian traffic.

### SUPERIOR COLOR

Proprietary resin system ensures homogenous color throughout the tile.

### 5-YEAR WARRANTY

5-year manufacturer warranty

### PRODUCT ASSORTMENT


Available in five standard tile sizes and 20 radius capabilities 9R-70R.

### STOCK ITEM

Able to meet any standard size and color order.

### ADA COMPLIANT

Complies with ADA Accessibility Guidelines (ADAAG) for Public Rights-Of-Way (July 26, 2011).

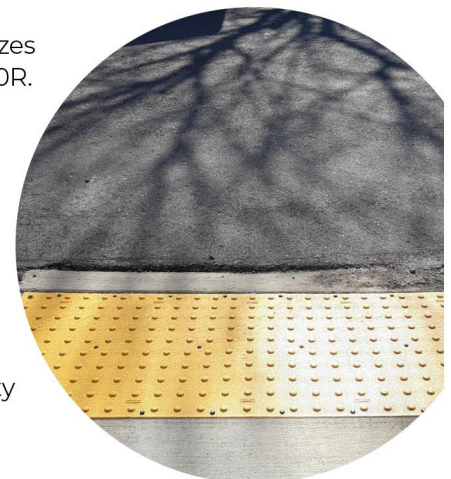

# Polymer Surface-Applied ADA Detectable Warning Tile



**TRAFFIC SAFETY  
SUPPLY COMPANY**





## IN-HOUSE POLYMER PRODUCTION

Vertical manufacturing of polymer tiles means we control the process from raw material to finished good.

- Proprietary polymer technology offers exceptional performance
- ADA compliant wet & dry slip-resistant surface
- UV-stable colorant holds color fastness
- In-house maintenance shop ensures quality control of molds
- ISO9001 certified complaint

## COLORS AVAILABLE




# Polymer Surface-Applied ADA Detectable Warning Tile



TRAFFIC SAFETY  
SUPPLY COMPANY



The EasyArc Radius Calculator quickly identifies the radius size closest to your project plans and creates a drawing and list of the radius components and quantities needed. The wedges and tiles are arranged side-by-side to form up to 20 radius configurations ranging from 9R to 70R.

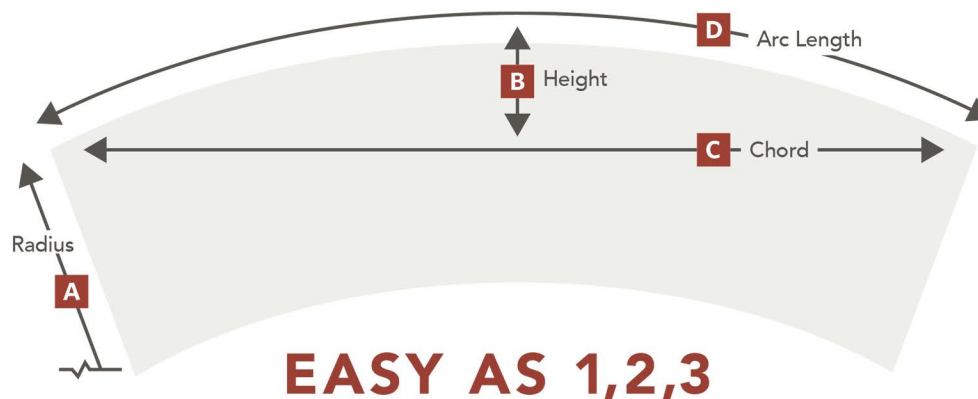

1

CHOOSE YOUR MATERIAL AND  
UNIT OF MEASUREMENT

2

ENTER THE RADIUS [A]  
OR HEIGHT [B]

3

ENTER THE CHORD [C]  
OR ARC LENGTH [D]